
REVISIONS						
REV	OR/CHANGE					
Α	RELEASE					

NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1. THE MAXIMUM OUTPUT VOLTAGE FROM THE SAFE AREA APPARATUS MUST NOT EXCEED THE RATED VOLTAGE OF THE TRANSMITTER: 30VDC.
- 2. CIRCUIT IN HAZARDOUS AREA MUST BE CAPABLE OF WITHSTANDING A VOLTAGE TEST OF 500 VRMS TO EARTH.
- 3. THE INSTALLATION MUST COMPLY WITH THE APPROPRIATE NATIONAL INSTALLATION REQUIREMENTS.

DIVISION 2/ZONE 2 INSTALLATION

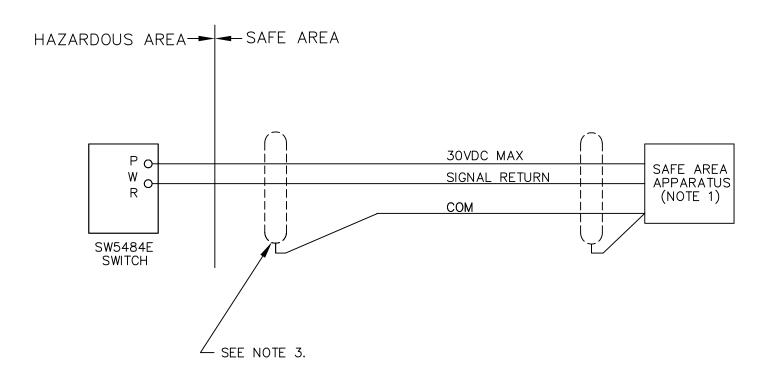

AGENCY APPROVED PRODUCT

DO NOT DEVIATE FROM

DOCUMENTED CONSTRUCTION

OR LISTED PARTS

Verifie' et Certfie' conforme a' l'execution

MATERIAL: FINISH:	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. ALL CORNERS BROKEN TO .010 MIN RADIUS AND TOLERANCES ARE:			APPROVALS DRAWN BY: A. Wilson CHECKED BY:	DATE 04-15-20		METRIX	HOUSTON, 1 USA	EXAS	
THIS DOCUMENT AND ALL INFORMATION HEREON IS THE PROPERTY OF METRIX INSTRUMENT CO. APPROVAL MUST BE OBTAINED BEFORE IT IS REPRODUCED OR INFORMATION HEREON IS ISSUED TO A THIRD PARTY. THIS DOCUMENT MUST BE RETURNED UPON REQUEST.	FRACTIONS: DECIMALS: ±1/64 .XX ±.01 .XXX ±.005 ANGLES: ±1' SURFACE FINISH 64/	NEXT ASSY APPLIC	SW5484E USED ON CATION	APPROVED BY: DO NOT SCALE D	PRAWING	SCALE: 1:1	NSTALLATION, INCREASED DRAWING NO. 18	SAFETY 371697	,	REV. A