

OVERVIEW

The SA6200A API 670 Accelerometer is capable of sensing a wide range of vibration frequencies, which makes it ideal for use on a variety of machines. It consists of a temperature stabilized piezo-electric sensor and an amplifier packaged together in a 316 stainless steel case, from which the sensing circuit is electrically isolated. A built-in amplifier provides a high level, low impedance output, which is the industry standard. Refer to the accessories table of this manual for a choice of mounting alternatives.

FEATURES AND BENEFITS

- High accuracy and repeatability
- Eliminate wiring polarity errors with Independent Polarity Terminals (IPT®)* technology
- Eliminate false indications caused by high frequency noise rectified as low frequency using anti-ski slope technology

APPLICATIONS

- Motors
- Gear Boxes
- Paper Machines
- Pumps – Single-stage & multi-stage, centrifugal, reciprocating, reactor coolant and reactor recirculation pumps
- Fans
- Cooling Tower Fans
- Engines
- Generators
- Turbines – Steam and Gas
- Rotor Blade Pass Sensing
- Turbocharger Engine Vibration

API 670 COMPARISON TABLE

	SA6200A	API 670
Case Material	316 SS	316 SS
Frequency Response (± 3dB)	0.5 Hz- 10 kHz	10 Hz- 10 kHz
Noise Floor	0.003 g rms	0.004 g rms
Mounted Resonance	13kHz	N/A
Hazardous Area Certifications	CSA, ATEX, UKEX, IECEx, KOSHA, CCC, SIL	N/A



SPECIFICATIONS


Dynamics	
Accuracy	2% (repeatability)
Sensitivity (±5%)	100 mV/g (10.2 mV/m/s ²)
Frequency Response	• 2 to 5 kHz (± 5%) • 1.5 Hz to 7.5 kHz (±10%) • 0.5 Hz to 10 kHz (±3dB)
Resonant Frequency	13 kHz
Cross Axis Sensitivity	<5%
Measurement Range	50 g's pk / 35 g's RMS
Resolution	0.003 g's RMS
Mechanical	
Case Material	316 Stainless Steel
Connector Type	2-pin hermetic plug See How to Order "C"
Hermetic Seal	Welded
Mounting Stud	1/4-28 UNF, 1/4-20 UNC, or M6 x 1.0 (P/N 3719-007) See How to Order "B"
Sensing Element	Quartz
Weight	91 gm (3.1 oz)
Electrical	
Case Isolation	10 ⁸ W
Excitation Current	2 to 20 mA
Excitation Voltage	18 to 28 VDC, Polarity Indifferent
Full Scale Output Voltage	±5 volts
Output Bias	8 to 12 volts
Settling Time	5 seconds max.
Transient Protection	RFI & ESD
Environmental	
Shock Limit	5,000 g
Temperature Range	T3/T4:-54°C to +121°C (-65.2°F to +249.8°F)
Electromagnetic Compatibility	CE Certified
Hazardous Area Cert.	CSA, ATEX, UKEX, IECEx, KOSHA, CCC, SIL See How to Order "A"
Radiation Exposure Limit	5 x 10 ⁶ Rads (expected 30-yr dose)
Enclosure Rating	IP66

SAFETY INTEGRITY LEVEL

SIL is a method or measurement unit to determine the reliability of electrical, electronic and programmable systems. The purpose of the SIL certification is to measure safety system performance and the likelihood of failure. Achieving SIL certification, based on the IEC61508 Functional Safety Standard, signifies that the product has been thoroughly assessed and is a reliable electronic device ready to use across a wide range of industries.

Metrix products have been thoroughly evaluated by an independent third-party agency on the basis of IEC61508 Funds to obtain SIL certification.

WEIGHT & DIMENSIONS

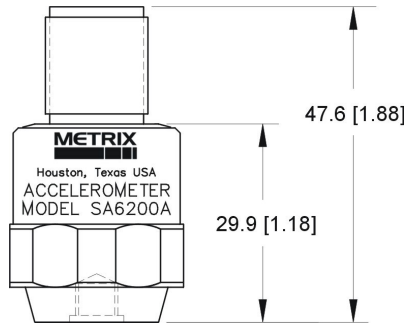

Approx. Weight: 91 gm (3.1 oz)
Units in mm [inches]

Electrical Connector 5/8-24 UNEF-2A 2 PIN (MIL-C-5015) shown. Note that the connections are non polarity sensitive (IPT*).

HOW TO ORDER

SA6200A - A B C

A	Hazardous Area Certification*	B	Mounting Stud	C	Connector Type
0	Non-Agency Approved	0	1/4-28 UNF		
1	NRTL US/CA, Class 1, Div 1, Groups A, B, C, & D, T3/T4 Intrinsically Safe ² when connected per dwg 9352	1	M6 x 1.0		
2	ATEX, UKEX, Ex ia IIC T3/T4 Ga Intrinsically Safe ² when connected per dwg 9352	2	1/4-20 UNC		
3	NRTL US/CA Class 1, Div 2, Groups A, B, C, & D, T3/T4 Non-incendive when connected per dwg 9031	3	NONE		
4	ATEX, UKEX, Ex nA IIC T3/T4 Gc Non-incendive when connected per dwg 9031	5	1/4-28 UNF & M6 x 1.0		
5	NRTL US/CA, Class 1, Div 2, Groups A-D, T3/T4 (non incendive) NRTL US/CA, Class 1, Div 1, Groups A-D, T3/T4 (I.S. w/barrier) ATEX/UKEX/IECEx/KOSHA/CCC, Ex nA IIC T3/T4 Gc (non incendive) ATEX/UKEX/IECEx/KOSHA/CCC, Ex ia IIC T3/T4 Ga (I.S. w/barrier)			1	2-pin Hermetic Plug
6	IECEx/CCC, Ex ia IIC T3/T4 Ga Intrinsically Safe ² when connected per dwg 9352				
7	IECEx, Ex nA IIC T3/T4 Gc Non-incendive when connected per dwg 9031				

Ordering Option Example: SA6200A-201: Hazardous area cert ATEX, Ex ia IIC T3/T4 Ga intrinsically safe, 1/4-28 UNF mounting stud and 2 pin hermetic plug.

*For SIL approval, add an "S" prefix to the desired Hazardous Area Certification (Option A).

ACCESSORIES



8978-111-XXXX, Splash proof Cable Assembly

Two (2) pin socket connector with integral, molded splash proof boot with 6.4 mm (0.25") diameter polyurethane jacketed cable with twisted shielded pair wires. XXX.X = Cable length in meters.



9334-211-XXXX-YYYY, Cable Assembly with SS Armor

Two (2) pin socket connector with 7.1 mm (0.28") diameter, SST armored jacket with cable, twisted shielded pair wires. XXX.X = Armor length in meters. YYYY = Cable length in meters. Specify lengths in increments of 0.5 m.



9334-111-XXXX-YYYY, Splash proof Cable Assembly with SS armor

Two (2) pin socket connector with integral, molded splash proof boot with 7.1 mm (0.28") diameter, SST armored jacket with cable, twisted shielded pair wires. XXX.X = Armor length in meters. YYYY = Cable length in meters. Specify lengths in increments of 0.5 m.



8978-200-0000, Connector Assembly

Two (2) pin socket connectors with cable strain relief, no cable.



3719-002, Mounting Stud

1/4-28 UNF to 1/4-28 UNF



3719-007, Mounting Stud

1/4-28 UNF to M6 x 1.0



8978-211-XXXX, Cable Assembly

Two (2) pin socket connectors with cable strain relief with 6.4 mm (0.25") diameter polyurethane jacketed cable with twisted shielded pair wires. Note: All 8978 connector/cable assemblies rated to 121°C (250°F) max. XXX.X = Cable length in meters.

ACCESSORIES (Continued)

**7084-002 Flange Mount Adaptor**

For surface mounting of 7295 housing. 1/4" NPT center hole. 3 equally spaced 6.6 (.26) dia. mount holes on 38 (1.50) dia. circle. Stainless Steel housing.

**9061-XXXX Bulk Cable**

.250" dia. bulk cable with twisted, shielded pair wires. For customer attachment to mating connector P/N 8978-200-0000. Specify XXX.X in 0.1 m increments (e.g. 9061-0250=25.0 m). Polyurethane Jacketed.

**99506-020 Magnetic Mount Adaptor**

1" OD, 35 lb. pull strength adaptor for sensors with 1/4-28 UNF stud. Stainless Steel housing.

**99506-021 Magnetic Mount Adaptor**

Same as 99506-020 except metric version. Housing has M6 x 1.0 center hole and comes with matching sensor mounting stud. Stainless Steel housing.

9338-101 Spot Facing Kit

Consists of a 1" HS air-craft counter bore with 3/16" guide pin, two each, along with 3/16" drill bits, two each, #3 drill bits, two each, 1/4-28 tapered taps and 1/4-28 bottom taps, two each.

NOTES:

1. IPT (Independent Polarity Terminal) is a registered trademark of Metrix Instrument Co.
2. When wired using approved barrier (not included).

Note: Metrix is continuously improving our products. Please refer to our website to download the latest version of this document.

All trademarks used in this document belong to Metrix.

© 2026, Metrix Instrument Company, L.P. All rights reserved.